

SPECIFICATION

Quality		: LONDON / LONDON LINES
Product definition		: tufted loop pile
Gauge		: 1/8"
No. of tufts	ISO 1763	: ± 177000/m ²
Pile fibre		: 100% polyamide SDN
Pile weight	ISO 8543	: 600 gr/m ² ± 5%
Pile height	ISO1766	: 3.5 mm ± 5%
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex with a non-woven fabric
Total thickness	ISO 1765	: 7.2 mm ± 7,5%
Total weight	ISO 8543	: 4200 gr/m ² ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20

PERFORMANCE

Use classification		: Class 33
Castor chair test	EN 985	: A, continues use
Abrasion	ISO 12951	: pass
Vettermann test	ISO TR 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: 0.09 m ² K/W
Dimensional stability	ISO 2551	: pass

ELECTROSTATIC PROPERTIES


Walk on test	ISO 6356	: -0.1 kV
Horizontal electrical resistance	ISO CD 10965	: 8x10 ⁹ Ω
Vertical electrical resistance	ISO CD 10965	: 4x10 ⁹ Ω
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: B _{fl} -s1
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: > 5.0
Rubbing, dry	ISO 105 X12	: 4.5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.5
Water	ISO 105 E01	: 5.0
Water stains	TNO W 6024	: 5.0

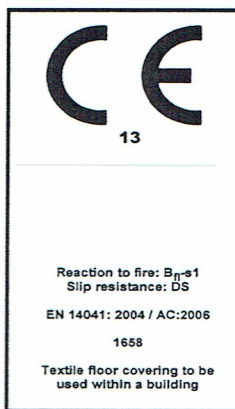

GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

2677 Black	2676 Grey	7785 Charcoal / Antracite
2678 Charcoal	2675 L. Grey	

9708 Beige / Brown	2697 Beige	2698 Brown
2684 D. Blue	2690 Earth	2644 L. Green

7578 L. Grey / Charcoal	8478 Blue / Charcoal
	7755 Charcoal / Red

2642 D. Green	2615 Red	2617 Orange
2686 Blue	Polyflex Backing	Felt Backing